

ISOLATING GROUND SWITCH - TEST STATION

FOR UTILITY MARKER POSTS, PEDESTALS, CABINETS, HANDHOLES, VAULTS, ENCLOSURES

Isolating ground plate provides easy access for locating technician; no need to remove bonding and grounding harnesses. Made from tin-plated brass components and engineering-grade thermoplastic.

FEATURES AND BENEFITS

- Saves time for locating—no need to remove connections to isolate and reattach connections.
- Accepts #6-#24 AWG wires.
- EM9195-CI comes standard with one blue, one orange, one brown, one slate, one green, and one red color-coded nut. Also available in other colors upon request.

ORDERING INFORMATION

EM9123-XX - Three-position isolating ground plate with ground lug. (See *XX below.)

EM9125-XX - Six-position isolating ground plate with ground lug. (See *XX below.)

*XX = Utility color code:

BL = Blue - Water


OR = Orange - Communication

YL = Yellow - Gas

EM9125-CI - Isolating ground plate color-coded for multi-directional cable identification.

For extender, add suffix - **PB**


For vault bracket, add suffix - **VB**

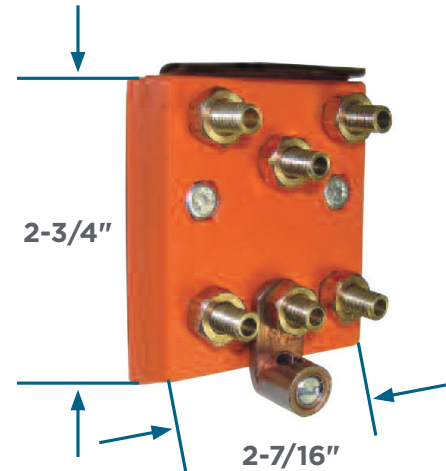

EM9123-BL



EM9123-YL




EM9125-OR



EM9125-CI



EM9125-OR-PB



EM9125-OR-VB



ISOLATING GROUND SWITCH - TEST STATION

INSTALLATION INSTRUCTIONS


STEP 1

- Bonding harnesses and ground connected.




STEP 3

- Place locating transmitter clip on terminal, for a direct isolated connection to cable for locating.

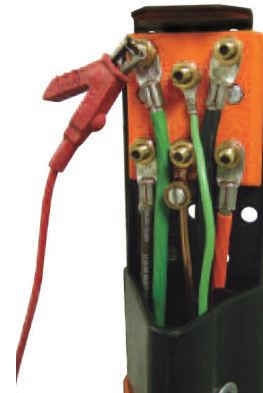

STEP 2

- Place thumb under isolation lever on top and move upward into isolated position.

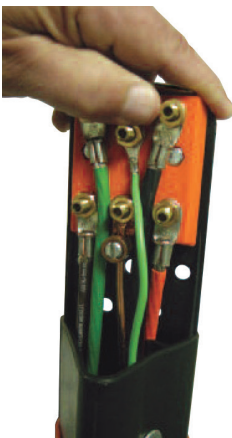

STEP 4

- When locating is complete, push down on lever to ground bonding harnesses.

